

New

NH-PW-N Series

Self-Priming Magnetic Drive Pump



- Precision injection part, glass-fiber reinforced PP.
- Advanced design with gas and water separated construction
- Heavy duty , Reliability
- Available in 5 models with max flow rate of 510 lit/min.
- Max suction lift head 4 m.
- Adaptable with standard IEC motor.





Specification table

Model	Connection Method		Performance M-L/Min , 50~60Hz		Max Self Priming Lift head (m)	Motor kW (2P)
	Flange (mm) In x Outlet	Thread (") In x Outlet	Specified Total Discharge Head (m)	Max Discharge (L/Min)		
NH-400PW-N	40A x 40A	1 1/2" x 1 1/2"	140/140-5.5/5.5	200/200	3	0.4
NH-401PW-N	40A x 40A	1 1/2" x 1 1/2"	200/200-8.0/8.0	280/280	3	0.75
NH-402PW-N	50A x 40A	2" x 1 1/2"	200/200-14.5/13.5	380/370	4	1.5
NH-403PW-N	50A x 40A	2" x 1 1/2"	300/300-15.5/14.5	470/470	4	2.2
NH-405PW-N	50A x 40A	2" x 1 1/2"	330/330-19.0/18.0	510/510	4	3.7

Pump performance curve

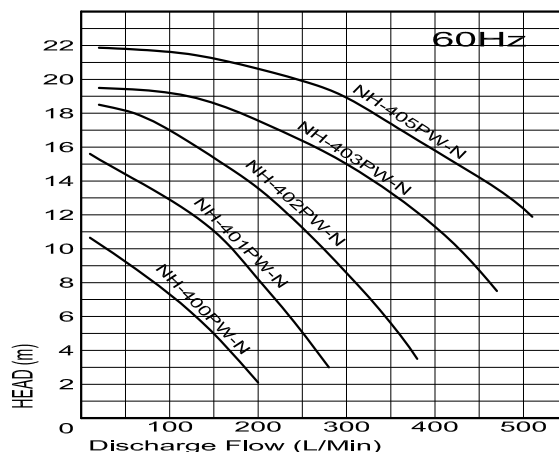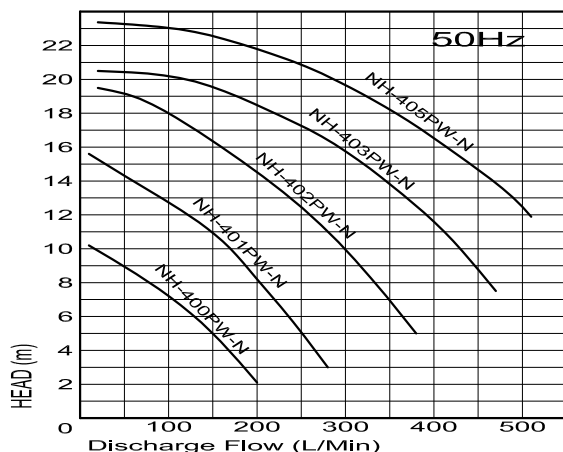

Installation dimension

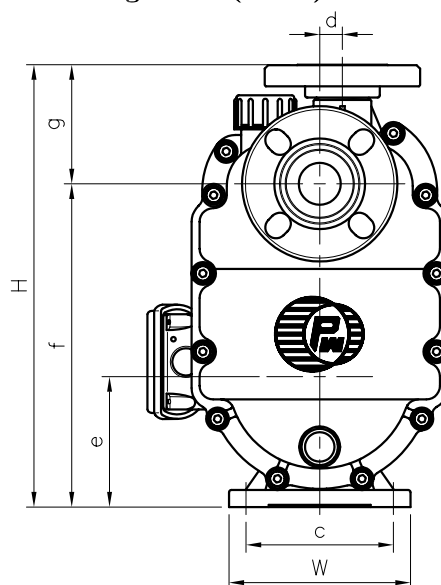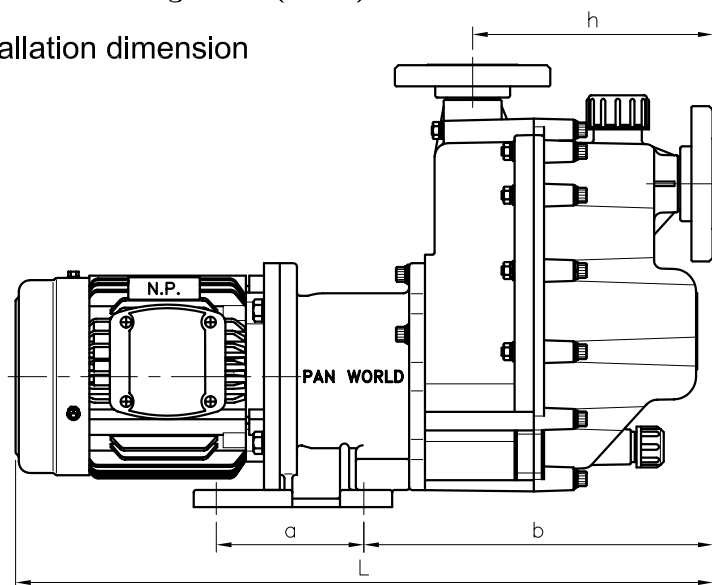

NH-PW-N Dimensions in mm

Model	W	H	L	a	b	c	d	e	f	g	h
NH-400PW-N	160	390	613	130	308	130	20	115	285	105	212
NH-401PW-N	160	390	615	130	308	130	20	115	285	105	212
NH-402PW-N	260	420	762	200	333	208	30	115	315	105	250
NH-403PW-N	260	420	762	200	333	208	30	115	315	105	250
NH-405PW-N	260	435	866	200	333	208	30	130	330	105	250